


LABEL SPECIFICATIONS

4210 EP Food Direct (2k)



4210 Food Label
(1.45" x 1.66")

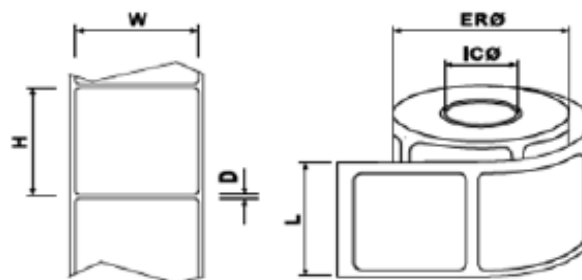

Characteristics	At least 2000 good labels per roll
Product Description	4210 EP Food Direct AA, DE, 8.2MHz, 2KR
Part No:	10115310
Label Dimensions (WxH):	37mm x 42mm (1.45" x 1.66")
Distance between labels (D):	.203mm (0.008")
Linear Width (L):	42mm (1.65")
External Roll Diameter	229 mm (9")
Inner Core Diameter	76mm
Face Sheet:	Clear Polyester (PET) w/ White Thermal Transfer
Adhesive:	General purpose (direct contact approved)
Labels per roll:	2,000
Labels per case:	20,000
Max bad tags per roll	5%
Bad Labels Marked	No
Weight roll:	2.26kg (2.58 lbs)
Weight case:	15.9kg (35 lbs)
Frequency (MHz) ± 5%:	8.2 Mhz +/- 5%
Electrostatic Discharge Tolerance (ESD):	5 kv (minimum)
*Minimal Order Quantity (MOQ)	20,000 (1 Case)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C
Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years** • Cases should never be stacked more than 5 high

*Unless otherwise specified in contractual conditions

**RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.

All rights reserved © Checkpoint Systems Inc. Thorofare, USA 2010

All information and illustrations are intellectual property of Checkpoint Systems, Inc.

Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited.